

Hot Water Heaters



- Fused Ceramic Shield™ tank lining is corrosion-resistant for years of dependability.
- Adjustable temperature controls for "set and forget" comfort and convenience.
- Non-CFC foam insulation traps heat inside the tank, saving energy
- Anode rod gives added protection against corrosion
- Heavy-duty burner assembly for even flame distribution, powerful heating and quick recovery. Propane models feature rugged cast-iron burner.
- Unique flue baffle extracts heat for maximum efficiency.




One Year Warranty ELECTRIC								
Stock #	U.S. GAL.	# of Elements	Volts	Weight	CONN. INS.	Height Inches	Dia.	Watts
431705	30	2	240	79	Side	45-1/4"	18"	4500
431707	30	2	240	91	Top	29-1/2"	22"	4500
431739	30	2	240	91	Side	29-1/2"	22"	4500
431709	30	1	120	91	Top	29-1/2"	22"	1500
431738	30	1	120	91	Side	29-1/2"	22"	1500
431716	40	2	240	122	Top	31-5/8"	24"	4500
431712	40	2	240	94	Top	47-1/4"	20"	4500
431714	40	2	240	94	Side	47-1/4"	20"	4500
431711	40	2	240	94	Side	47-1/4"	20"	3500
431718	50	2	240	115	Top	50"	20"	4500
NATURAL GAS*								
431720	30	3" VENT		107	Top/Top	59-3/4"	16	31,000
431722	40	3" VENT		123	Top/Top	60-3/4"	18	31,000
Five Year Warranty								BTU
PROPANE GAS SEALED COMBUSTION DIRECT VENT*								
431725	30	n/a	n/a	103	Side/Top	56-1/4"	16	30,000
431727	40	n/a	n/a	119	Side/Top	56-3/4"	18	30,000

Six Year Warrant ELECTRIC								
Stock #	U.S. GAL.	# of Elements	Volts	Weight	CONN. INS.	Height Inches	Dia.	Watts
431703	20	1	120	60	Side	24-3/4"	18"	1500
431706	30	2	240	79	Side	45-1/4"	18"	4500
431708	30	2	240	91	Top	29-1/2"	22"	4500
431740	30	2	240	91	Side	29-1/2"	22"	4500
431710	30	1	120	91	Top	29-1/2"	22"	1500
431741	30	1	120	91	Side	29-1/2"	22"	1500
431717**	40	2	240	122	Top	31-5/8"	22"	4500
431715	40	2	240	94	Side	47-1/4"	20"	4500
431735	40	2	240	94	Top	47-1/4"	20"	4500
431719	50	2	240	115	Top	50"	20"	4500
NATURAL GAS*								BTU
431721	30	3" VENT		107	Top/Top	59-3/4"	16	31,000
431723	40	3" VENT		123	Top/Top	60-3/4"	18	31,000

* Comes equipped for natural; contains kit to convert to propane gas.
 ** Sold with exterior blanket to meet DOE compliance.

Blevins Order Online Anytime at www.blevinsinc.com

Pressure Regulators Cash-Acme EB-75 Compact




451001 3/4"

Fully pressure-balanced piston, automatically reduces and regulates high inlet pressures down to 45 psi at standard factory setting. Built-in back pass check which operates independently of the regulator, allowing water to flow back through the regulator in cases of thermal expansion caused by hot water heating devices. Iron body, threaded connections, iron spring chamber, brass piston and seat ring. EP rubber seat disc and diaphragm and a built-in brass strainer screen.

Watts N250


Stainless steel seat, integral strainer. Unitized construction. High temperature resisting diaphragm for hot or cold water. For supply pressures up to 250 lbs. Adjustable reduced pressure range 30-60 lbs. Standard setting 50 lbs. All working parts easily and quickly serviceable without removing valve from line. 3/4" x 3/4" FPT.



451002 48/Ctn.

Hot Water Heater Insulation Blanket

Effectively contains the 15% of energy that regularly escapes into the air, saving over 720 kilowatt hours per year. Includes everything you need to insulate a hot water heater. Includes 100" of vinyl tape and instructions. 10/Ctn.

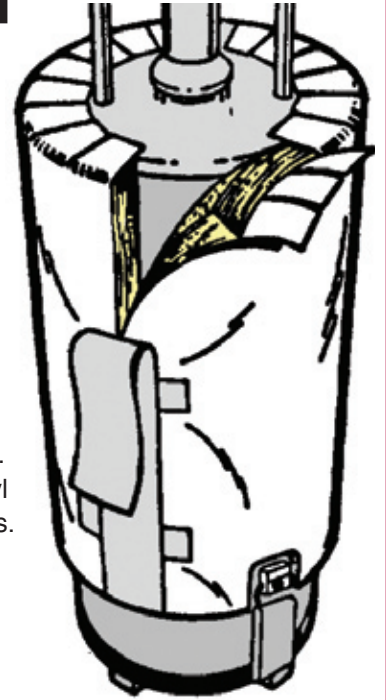

270500


Pipe Wrap Insulation



Contains one roll of 3" x 25' fiberglass and vinyl outer wrap. Use only with thermostatically controlled units.

270801 24/Ctn.

Permanent Pipe Insulation

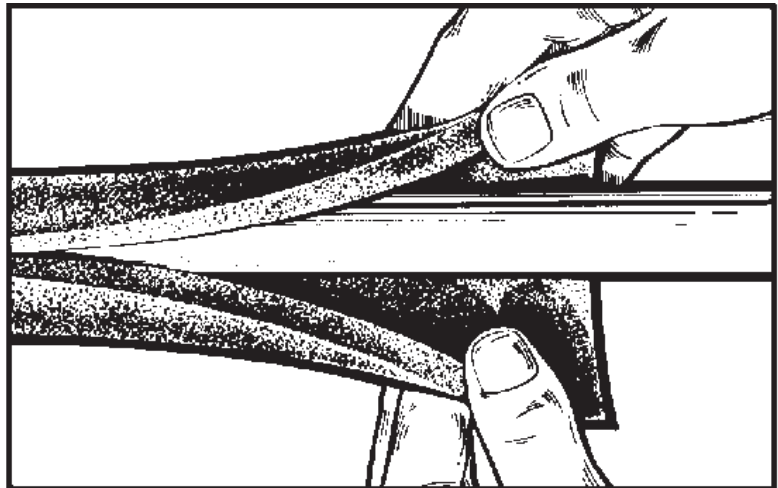

Single step foam with half-slit slips easily over pipe. Self-closing, so no tape is needed. Flexible. 6' lengths. 48/Ctn.

- 270526 3/8" Wall Thickness, 7/8" ID for 3/4" Copper Pipe
- 270527 3/8" Wall Thickness, 1-1/8" ID for 1" Copper Pipe
- 270495 1" Wall Thickness, 1-1/8" ID for 1" Copper Pipe (R 6.4)
- 270802 3" Wall Thickness, 3' Long
- 270525 1/2" Wall Thickness 6' Long

Blevins Order Online Anytime at www.blevinsinc.com